


*All external corners must be bevelled and all internal corners must have angle fillet.
 *All corners must have double thickness.

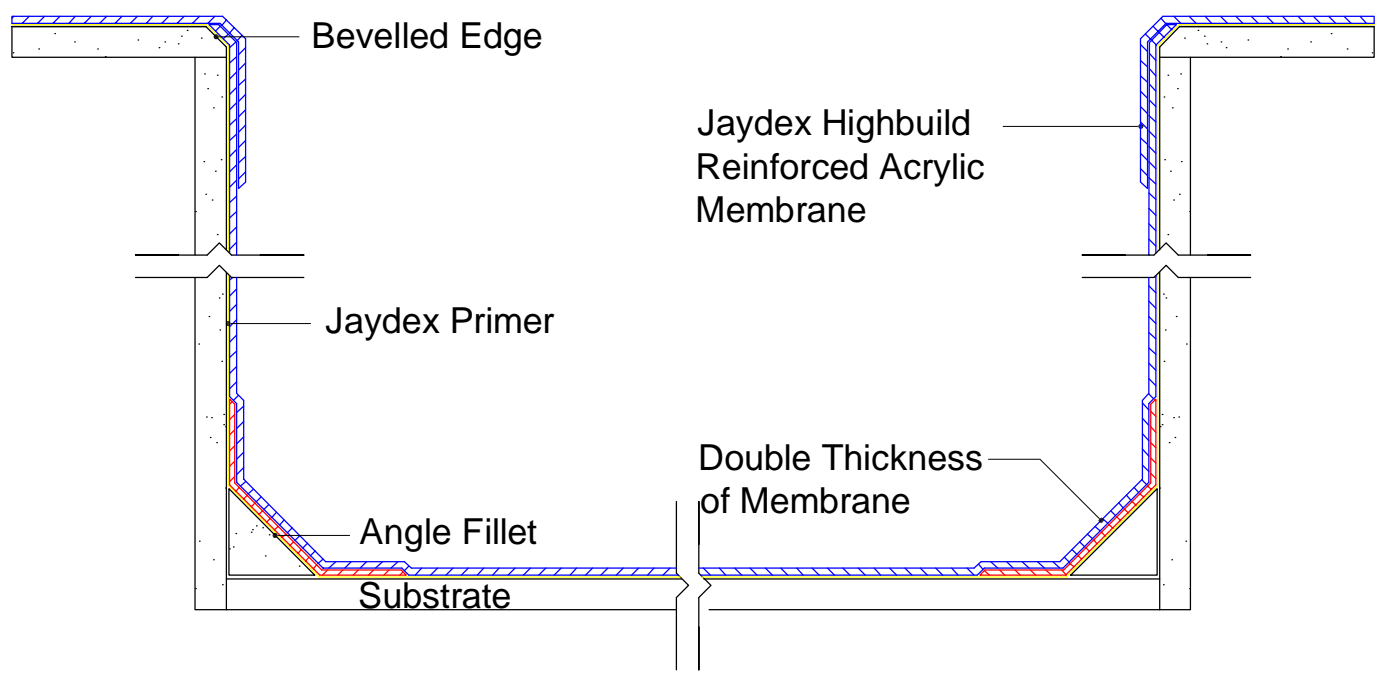

DECK	INTERNAL GUTTER
Reinforced Highbuild Acrylic Membrane System	
Sealed Acrylic Surface Finish	
DK/12/HA/SA	Date: 06/06 Drawn: SB

JAYDEX
 INTERNATIONAL · LIMITED

UNIT 3c-3 MARKEN PLACE,
 GLENFIELD, AUCKLAND
 P.O Box 100 000
 NORTHSHORE MAIL CENTRE

PHONE Bus. (09) 444-1751
 FAX (09) 444-0132
 E-MAIL jaydex@xtra.co.nz
 sales@jaydex.com

Disclaimer
 The detailed drawings as outlined are based on our experience and application procedures and represent the latest information available. No responsibility is taken for uses to which this information may be put, but we advise that where the application is in complete conformity with the appropriate specification a warranty maybe available.

We reserve the right to alter or up date the information parameter at anytime without prior notice. *Copyright