


RUBBERIZED THERMOPLASTIC INTERLOCKING PEDESTRIAN TILES


Multi purpose anti-slip flooring system with excellent resistance characteristics for use on flat roofs, leisure areas balconies and access pathways which can be used as protection for the underlying material. Thanks to the raw material high quality can be applied for internal/external areas. The weight of 6,50 each square meters allow the use on roofs with low bearing capacity. Pedestrian tiles can be quickly lifted and re-located when floor layouts are re-configured.

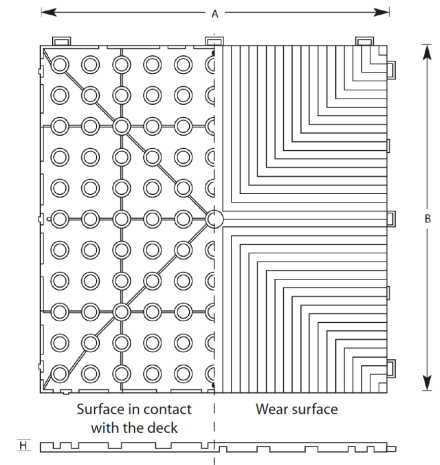


ITEM	5-000072	5-000082
ART.	250	250G
A	400	400
B	400	400
H	10	10

Raw material	Thermoplastic Rubber additivated UV Shore D45
Elongation/deformation	0,7%
Working range	-30°C + 70°C
Determination of compressive strength certified N5000 on area of 10.000 mm²	Certificate available upon request


COLOURS




Art. 250
Black RAL 9005



Art. 250G
Grey RAL 7038



Art. 250V
Green RAL 6002



Art. 250M
Brown RAL 8002