

# RECTANGULAR SIDE DRAIN




## Strong Light Rectangular Side Drain (outlet) units for Roofs and Deck

Typically used as a main rainwater discharge unit from gutters, decks and roofs through parapets.

Flanges and stems can be easily trimmed to suit site requirements.

ITEM	5-000061	5-000005
ART.	45	117
A	120	120
B	140	98
H	65	40
L	500	310
L1	97	50

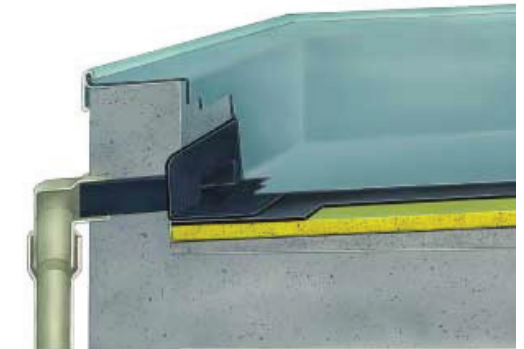


Can be used with or without insulation



Art. 45



Art. 117

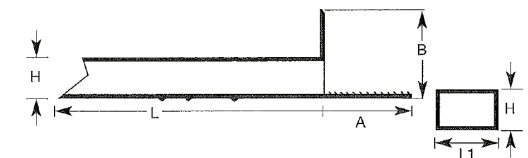

Art.44  
Leaf Grate



Art.47  
Reducer 65x100 to 100 D/P Ø

# RECTANGULAR SIDE DRAIN - OUTLET DETAIL GUIDE

**NOTE 1**

Z: VARIABLE ACCORDING TO WIND ZONING.

\* ALL INTERNAL TRANSITIONS MUST HAVE ANGLE FILLET.

\* ALL EXTERNAL TRANSITIONS MUST BE BEVELLED.

\* THE MEMBRANE MUST EXTEND ACROSS THE TOP OF THE PARAPET.

\* THE TOP OF THE PARAPET SUBSTRATE, MUST BE ANGLED TO ALLOW WATER TO RUN OFF THE TOP OF THE PARAPET.

\* ALL FIXINGS FOR THE CAP FLASHING, MUST BE THROUGH THE SIDE OF THE FLASHING.

**NOTE 2**

ROOF/ DECK SUBSTRATE AND WALL PARAPET CAN EITHER BE OF A WOODEN OR CONCRETE COMPOSITION.

